



ADD: 800 METERS EAST OF
DAZIWEN VILLAGE, DAZIWEN TOWN,
ANPING COUNTY HEBEI CHINA.



TEL:86-311-89252231
FAX:86-311-68002522
WECHAT AND MOBILE:15710318353



E-MAIL: SALES
@CHINAFENCEFACTORY.COM



WWW.DQGABION.COM
WWW.CHINAFENCEFACTORY.COM
WWW.VINEYARDTRELLISING.COM



HEBEI DUNQIANG
HARDWARE MESH CO LTD
SHIJIAZHUANG CHARUI TRADE CO LTD





COMPANY PROFILE


HEBEI DUNQIANG HARDWARE MESH CO LTD IS ESTABLISHED IN 2006, IT IS LOCATED IN CHINA WIRE MESH HOME TOWN -ANPING, HEBEI PROVINCE. OUR PRODUCTS ARE WIDELY SOLD ACROSS CHINA AND MEANWHILE EXPANDED TO COUNTRIES AND DISTRICTS IN EUROPE, AMERICA, ASIA, MID-EAST, AFRICA AND SO ON. OUR COMPANY AND OUR PRODUCTS GET A GOOD APPLAUSE BY CUSTOMERS BOTH DOMESTIC AND ABROAD.

OUR COMPANY FOCUSES ON CUSTOMER NEED AND IS ORIENTATED BY ADVANCED TECHNIQUE PROCESS AND TECHNOLOGY DEVELOPMENT. WE STRENGTHEN OUR MANAGEMENT SYSTEM FROM EVERY DETAIL TO PROVIDE EXCELLENT PRODUCT AND SERVICE FOR OUR CUSTOMERS.

IN MANAGEMENT, WE FORMED A CULTURE OF STRICT REGULATION, PRECISENESS AND COOPERATION IN PRODUCTION. WE EMPHASIZE THE CONCEPT OF QUALITY FIRST AND TAKE ADVANTAGE OF OUR ADVANCED EQUIPMENT AND TECHNOLOGY, IN SERVICE, WE HOLD THE IDEA AND ATTITUDE OF HONESTY, COOPERATION AND COMMUNICATION.

WE HAVE OUR OWN PRODUCTION WORKSHOP.OUR COMPANY'S MAIN PRODUCTS INCLUDE **GABION BASKET, FENCE METAL PANEL , VINEYARD METAL POST, CHAIN LINK FENCE AND WELDED WIRE MESH ECT.** COMPANY IS ALWAYS IMPLEMENTING HIGH STANDARD ISO 9001 IN ALL THE PROCEDURES INCLUDING PURCHASING, PRODUCTION, SALE AND AFTER SALE SERVICE.

QUALITY IS BASED ON COMPLETE REGULATIONS AND QUALITY DETERMINES THE SURVIVAL OF OUR COMPANY, SCIENTIFIC MANAGEMENT DETERMINES EFFICIENCY AND GOOD HONESTY LEADS TO BETTER DEVELOPMENT. LOOKING FORWARD, WE ARE SINCERELY HOPING THAT WE WILL CREATE A BETTER TOMORROW WITH YOU WITH OUR QUALITY PRODUCT, REASONABLE PRICE AND PERFECT SERVICE. WELCOME TO CONTACT US FOR BUSINESS NEGOTIATION.

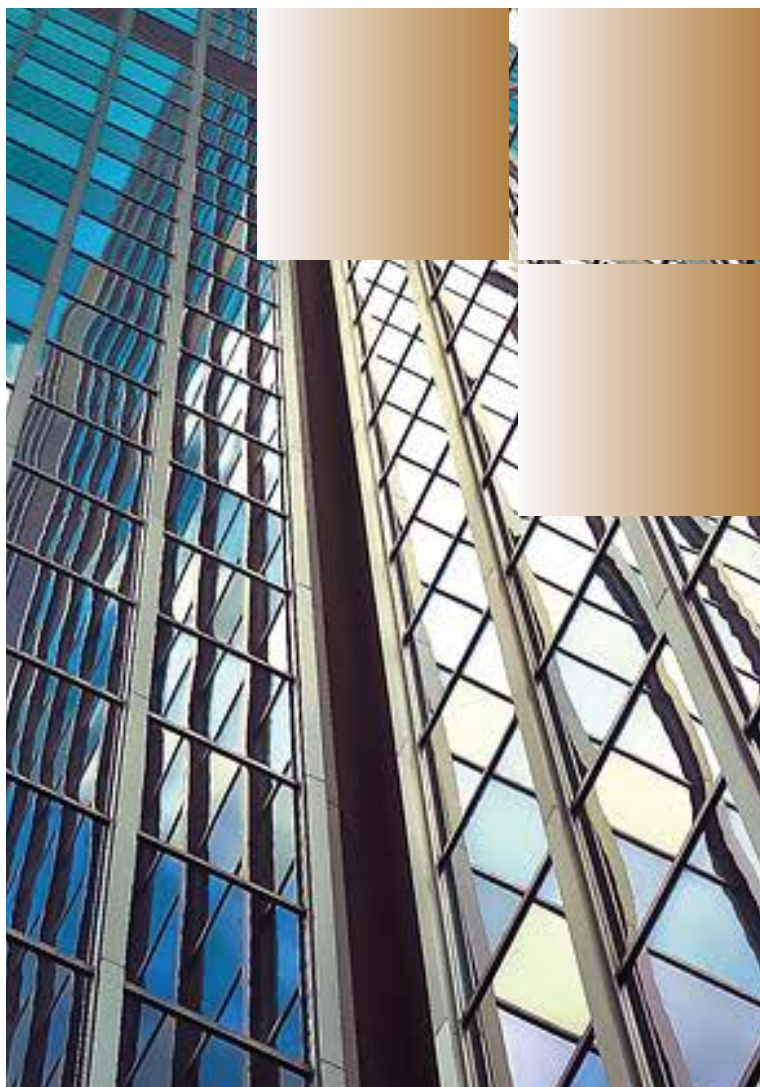

PRODUCT LIST

MILITARY PRODUCTS

- P4 ANTI-CLIMB FENCE
- P5-6 RAZOR BARBED WIRE
- P7-8 HESCO BARRIER

TRAFFIC SAFETY AND BORDER PROTECTION PRODUCTS

- P13-14 CROWD CONTROL BARRIER
- P15-18 TEMPORARY FENCE PANEL
- P19-20 3D CURVED WIRE MESH FENCE PANEL
- P21-22 AIRPORT FENCE

AGRICULTURAL AND ANIMAL PRODUCTS

- P27-28 VINEYARD METAL POST
- P29-30 OPEN GABLE TRELLIS SYSTEM
- P31-33 CATTLE LIVESTOCK FARM FENCE PANEL
- P34 BARBED WIRE
- P35 T POST
- P36 Y POST

WATER CONSERVANCY ENGINEERING PRODUCTS

- P9 -10 HEXAGONAL GABION BASKET
- P11-12 GABION RENO MATTRESS

GARDEN PRODUCTS

- P 23 WELDED WIRE MESH
- P24 CHAIN LINK FENCE
- P25 WELDED GABION
- P26 HEXAGONAL WIRE MESH

SPORTS COURT

- P 37-38 PLATE TENNIS COURT



CERTIFICATE OF HONOR



SPECIFICATION OF 358 ANTI CLIMB CLEAR VIEW FENCE



Specification of 358 anti climb Clear View fence

Mesh	Wire Diameter	Panel Width	Panel height	Post Type	
76.2x12.7mm	Horizontal Wire:	1m-3m	1m-6m	Square Post(SHS)	Rectangular Post(RHS)
75.0x12.5mm	3.2,3.5,4mm	popular:	popular:	60x60x2.0/2.5/3.0mm	40x60x2.0/2.5/3.0mm
75.0x25mm	Vertical Wire: 4mm	2.2m/2.5m/3m	2.5m/3m	80x80x2.0/2.5/3.0mm	40x80x2.0/2.5/3.0mm
75.0x50mm					60x80x2.0/2.5/3.0mm
Surface Treatment: hot dipped galvanized , galvanized +powder coated					
V-top:including angle iron, barbed wire,razor barbed wire					
Connecting Methods:iron bar , hexagonal clamp , screws					
Color:RAL 6005 green, RAL 7016 gray, All RAL color can be customized.					



RAZOR BARBED WIRE

Reference Type Number	Thickenss (mm)	wire diameter(mm)	Barb. length(mm)	Barb. width(mm)	Barb. spacing(mm)
BTO-10	0.5±0.05	2.5±0.1	10±1	13±1	26±1
BTO-12	0.5±0.05	2.5±0.1	12±1	15±1	26±1
BTO-18	0.5±0.05	2.5±0.1	18±1	15±1	33±1
BTO-22	0.5±0.05	2.5±0.1	22±1	15±1	34±1
BTO-28	0.5±0.05	2.5	28	15	45±1
BTO-30	0.5±0.05	2.5	30	18	45±1
CBT-60	0.6±0.05	2.5±0.1	60±2	32±1	100±2
CBT-65	0.6±0.05	2.5±0.1	68	21±1	100±2



RAZOR BARBED WIRE



Outside Diameter	No. of Loops	Standard Length per Coil	Type	Notes
450mm	33	7-8m	CBT-60/65	Single coil
500mm	56	12-13m	CBT-60/65	Single coil
700mm	56	13-14m	CBT-60/65	Single coil
960mm	56	14-15m	CBT-60/65	Single coil
450mm	56	8-9m	BTO-12/22/25/30	Cross type
500mm	56	9-10m	BTO-12/22/25/30	Cross type
600mm	56	10-11m	BTO-12/22/25/30	Cross type
600mm	56	8-10m	BTO-12/22/25/30	Cross type
700mm	56	10-12m	BTO-12/22/25/30	Cross type
800mm	56	11-13m	BTO-12/22/25/30	Cross type
900mm	56	12-14m	BTO-12/22/25/30	Cross type
960mm	56	13-15m	BTO-12/22/25/30	Cross type
980mm	56	14-16m	BTO-12/22/25/30	Cross type




DEFENSIVE BARRIER



Defensive Barrier is to bind the welded wire mesh with thick wire diameter into a net box with spiral tie wire. The surface of the welded gabion mesh is smooth and tidy, the mesh is uniform, and the welding point is firm. It has the advantages of strong firmness, corrosion resistance, permeability and integrity, and is easy to install.




Material :	Galvanized steel wire or Galfan/zinc-5% aluminum wire
Wire diameter:	4.0mm- 5.0mm
Aperture:	75mm x 75mm 76.2*76.2mm 80 x 80mm, 100 x 100mm
Non-woven geotextile	200g/m2, 300g/m2, 400g/m2

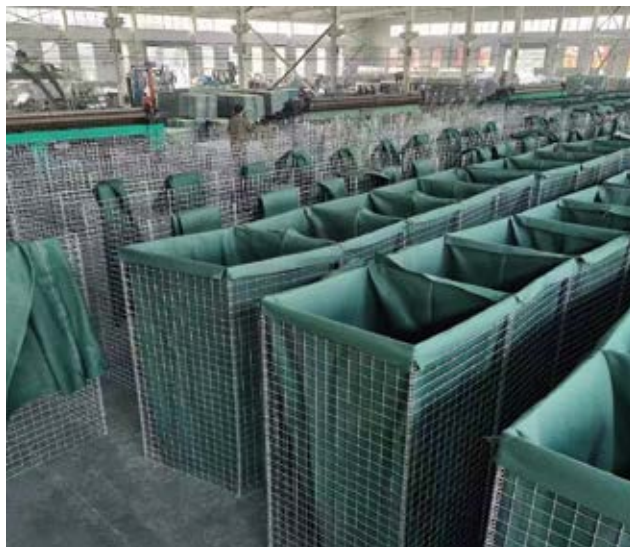

DEFENSIVE BARRIER


Standard sizes	Height	Width	Length	Cells
MODULE 1	54''(1.37m)	42''(1.06m)	32'9''(10m)	4+5 cells
MODULE 2	24''(0.61m)	24''(0.61m)	4'(1.22m)	2 cells
MODULE 3	39''(1.00m)	39''(1.00m)	32'9''(10m)	5+5 cells
MODULE 4	39''(1.00m)	60''(1.52m)	32'9''(10m)	2x5+2x5 cells
MODULE 5	24''(0.61m)	24''(0.61m)	10'(3.05m)	5 cells
MODULE 6	66''(1.68m)	24''(0.61m)	10'(3.05m)	5 cells
MODULE 7	87''(2.21m)	84''(2.13m)	91'(27.74m)	4+4+5 cells
MODULE 8	54''(1.37m)	48''(1.22m)	32'9''(10m)	4+5 cells
MODULE 9	39'(1.00m)	30''(0.76m)	30'(9.14m)	6+6 cells
MODULE 10	87''(2.21m)	60''(1.52m)	100'(30.5m)	5+5+5+5 cells
MODULE 11	48''(1.22m)	12''(0.3m)	4'(1.22m)	2 cells
MODULE 12	84''(2.13m)	42''(1.06m)	108'(33m)	5+5+5+5+5+5 cells
MODULE 19	108''(2.74m)	42''(1.06m)	10'5''(3.18m)	6 cells

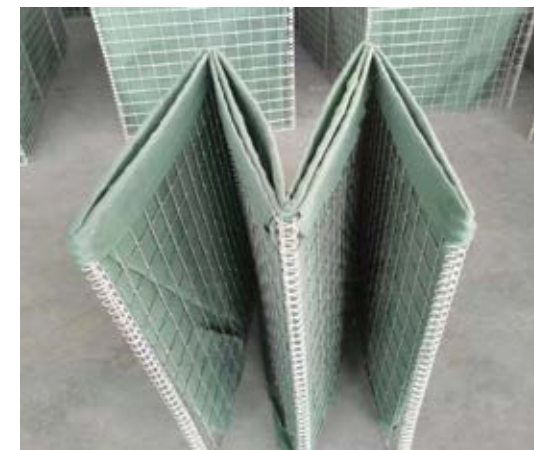




HEXAGONAL GABION BASKET

Material: Hot Dipped Galvanized Wire 30—60G/M2
Hot Dipped Galvanized Wire 200—500G/M2
Galfan Wire (95% Zinc + 5% Aluminum)
Galfan Wire (90% Zinc + 10% Aluminum)
Hot Dipped Galvanized Wire+PVC Coated

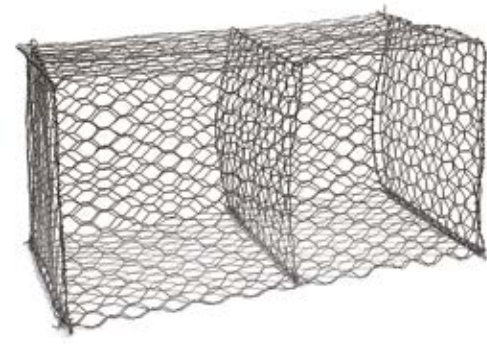


Gabion Mesh: **weaving method**

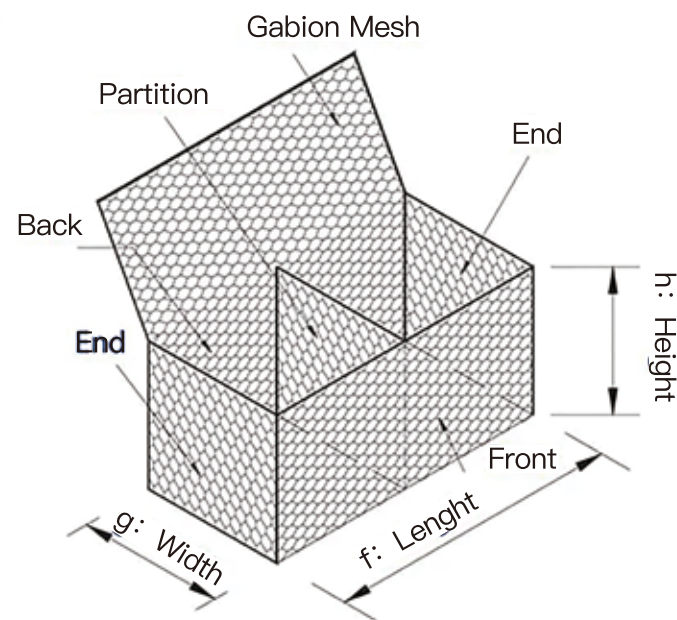

Required parameter

- a: material
- b: Wire Diameter: mesh wire, selvedge wire, lacing wire
- c: Mesh Size
- d: Partition Spacing
- e: Anti-corrosion Treatment: Galvanized, Zinc-aluminium, PVC Coated
- f: Length
- g: Width
- h: Height

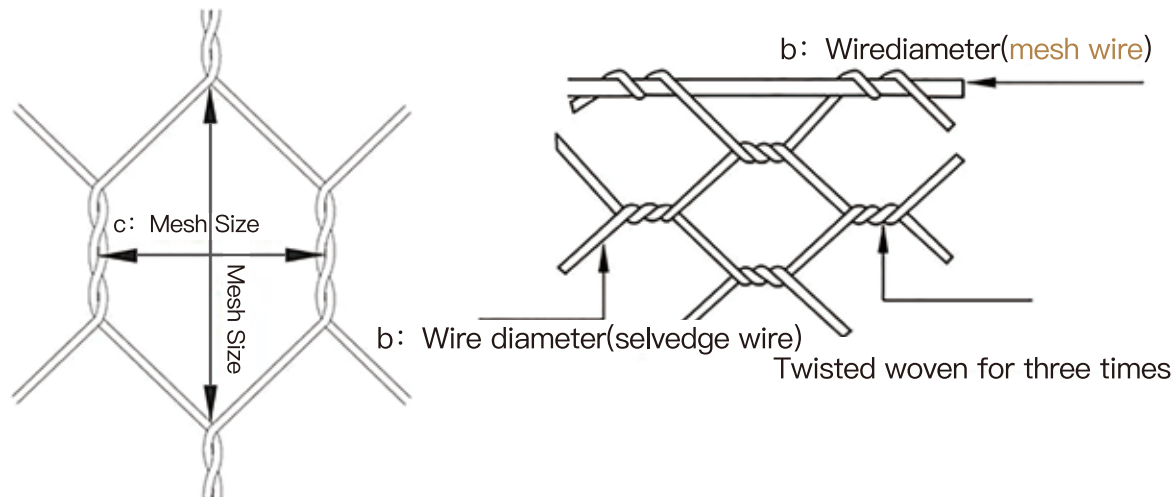

HEXAGONAL GABION BASKET



Wire Diameter (mm)	Siding Wire (mm)	Lacing Wire (mm)	Mesh Hole (mm)	Gabion Size(m)
2.0mm 2.2mm 2.4mm 2.7mm 3.0mm 3.5mm 4.0mm	3-4mm	2.0-2.2mm	60*80mm 80*100mm 100*120mm 120*150mm customized	2*1*0.5m 2*1*1m 3*1*1m 4*1*2m 4*2*0.3m 6*2*0.3m customized






GABION RENO MATTRESS

RENO MATTRESSES ARE MANUFACTURED FROM DOUBLE TWIST HEXAGONAL WIRE MESH WITH NEW POLYMER COATING POLIMAC, AND ARE SUPPLIED 6M X 2M DIMENSIONS WITH A THICKNESS LESS THAN 500MM. RENO MATTRESSES ARE FILLED WITH STONES ON SITE TO CREATE A FLEXIBLE, PERMEABLE AND MONOLITHIC STRUCTURE FOR USE IN RIVER AND CANAL BANK PROTECTION WORKS AS WELL AS EROSION CONTROL AND SCOUR PROTECTION OF SLOPES.



GABION RENO MATTRESS

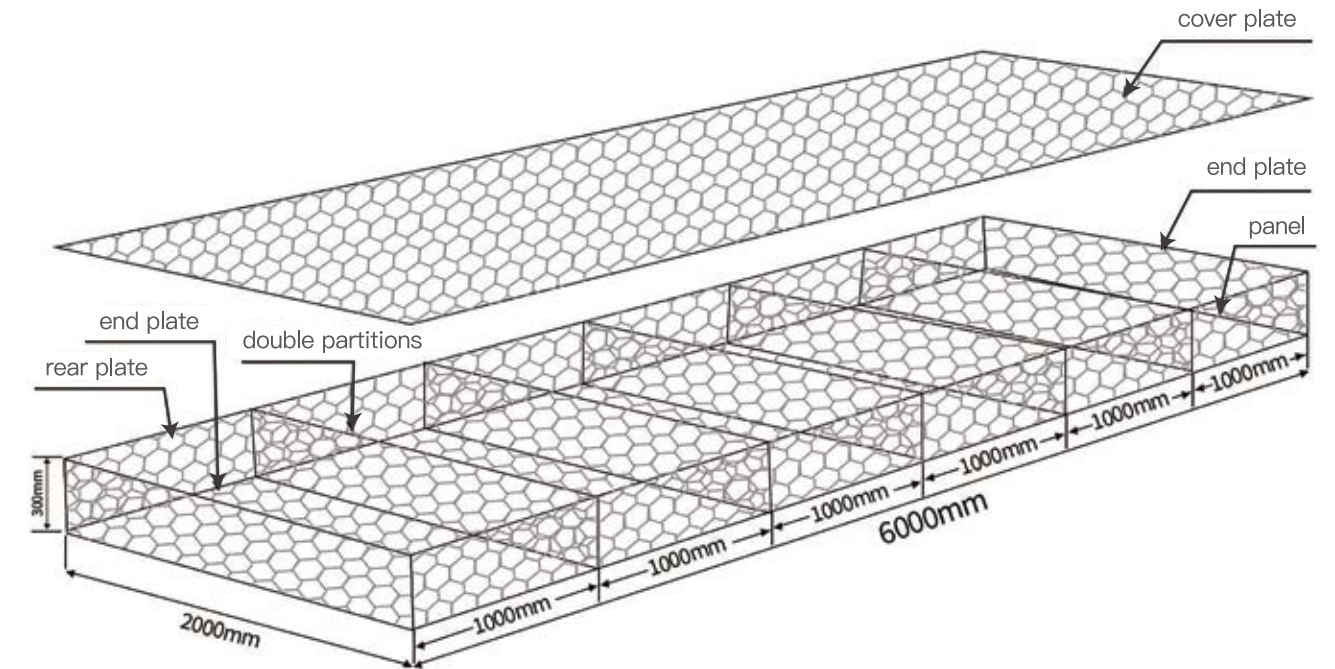

Mesh size	Mesh wire		Selvedge wire		Box sizes in meter		
					Length	Width	Height
60x80 mm	Galvanized	2.0 mm	GI	2.4 mm	1 to 6m	1 to 2m	0.15 to 1.0m
		2.2 mm		2.7 mm			
		2.4 mm					
	Galvanized + PVC	2.0/3.0 mm					
		2.2/3.2 mm	GI + PVC	2.4/3.4 mm			
		2.4/3.4 mm		2.7/3.7 mm			
80x100 mm	Galvanized	2.4 mm	GI	3.0 mm	1 to 6m	1 to 2m	0.5 to 1.0m
		2.7 mm		3.4 mm			
		3.0 mm		3.9 mm			
	Galvanized + PVC	2.4/3.4 mm	GI + PVC	3.0/4.0 mm			
		2.7/3.7 mm		3.4/4.4 mm			
		3.0/4.0 mm		3.9/4.9 mm			
100x120 mm	Galvanized	2.4 mm	GI	3.0 mm	1 to 6m	1 to 2m	0.5 to 1.0m
		2.7 mm		3.4 mm			
		3.0 mm		3.9 mm			
	Galvanized+ PVC	2.4/3.4 mm	GI + PVC	3.0/4.0 mm			
		2.7/3.7 mm		3.4/4.4 mm			
		3.0/4.0 mm		3.9/4.9 mm			





CROWD CONTROL BARRIER



crowd control barrier / concert crowd control barrier/ concrete crowd control barrier	
Panel size	1.1x2.1m,1.1x2.2m,1.1x2.5m, 1.2*2.5m (Or customized)
Outer tube	42mm,40mm,38mm,35mm,32mm 25mm O.D
Frame thickness	1.2mm 1.5mm, 1.8mm, 2.0mm
Inner tube	12mm,14mm,16mm,20mm,25mm O.D.
Inner tube thickness	1.0mm, 1.2mm, 1.5mm,
Spacing	60mm,100mm,190mm&200mm
Feet	crossed,bridge,flat,etc
Surface treatment	hot dipped galvanized,galvanized then pvc coated
Color	dark green, black, white, brown, etc.



CROWD CONTROL BARRIER

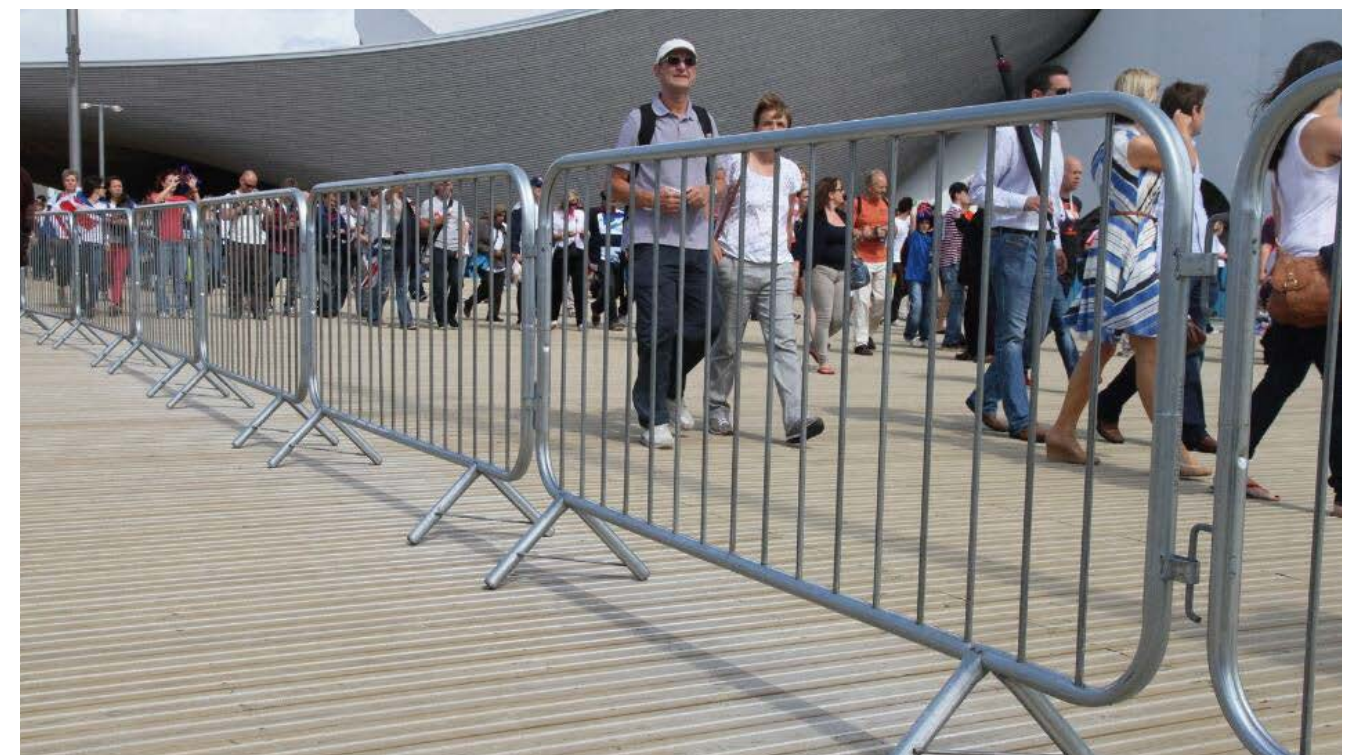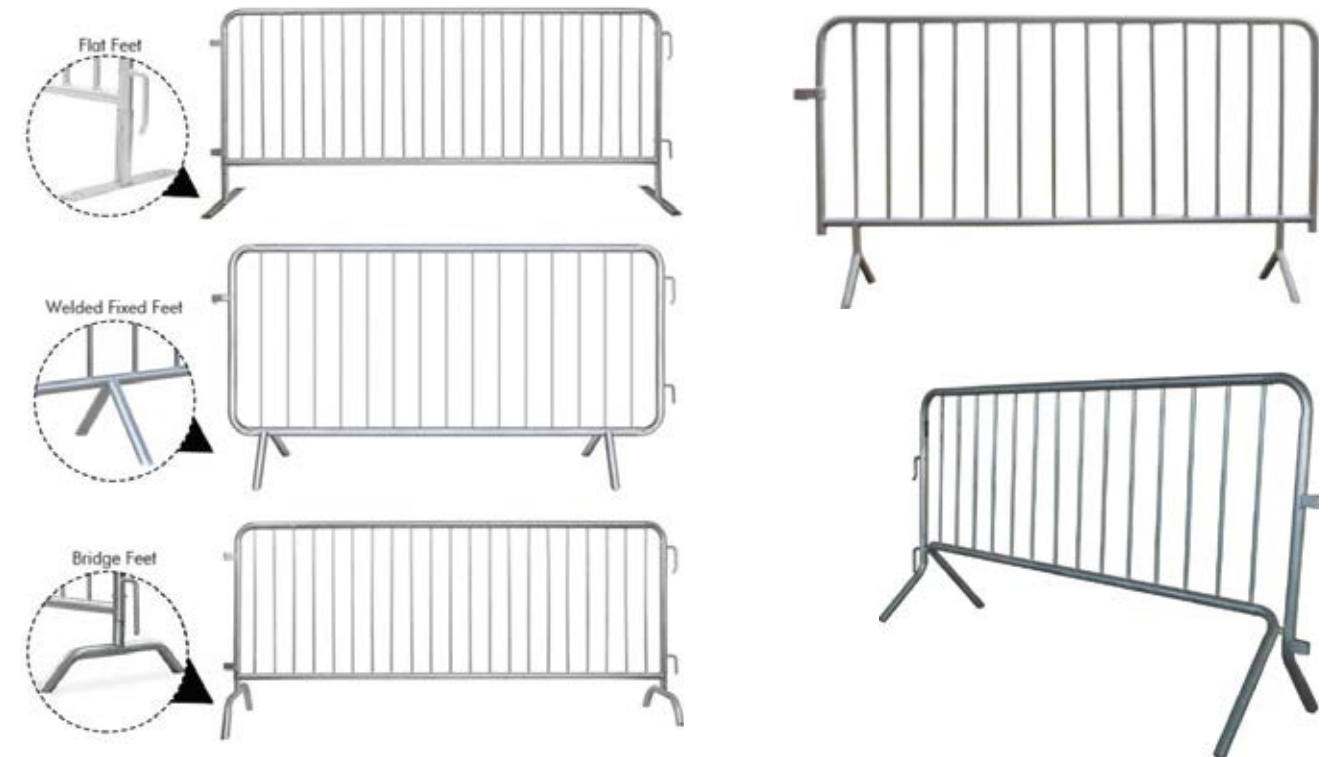



TEMPORARY FENCE PANEL



1.WELDING TEMPORARY MOVE FENCE:

A. Australia Temporary fence


Material: iron ,steel, galfan wire

Surface finish: Hot-dip galvanizing, dip-coating, spray blasting

Column: Square tube Round tube Peach column New anti-theft column Round tube is the most common



Can be used multiple times

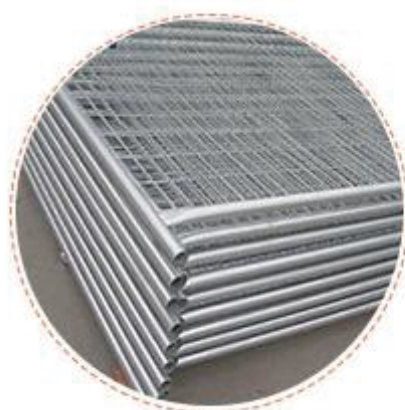

Flexible and easy to move



Easy to install

HEBEI DUNQIANG



TEMPORARY FENCE PANEL

AU/NZ Temporary Fence	
Panel Size	1.8*2.2m, 1.8*2.4m, 2.1*2.4m, 2.1*2.7m or as request
Wire Diameter	3.2mm, 3.5mm, 4mm or as request
Opening Size	50x50mm, 50x150mm 60*150mm 100x200mm
Frame OD	32mm, 38mm, 40mm, 42mm, 48mm
Frame Thickness	1.5mm, 1.8mm, 2.0mm
Surface Treatment	Hot dipped galvanized wire/pipe + painted silver color
	Black wire/pipe + hot dipped galvanized
Plastic feet size	560*240*130mm, 600*220*150mm or 610*230*150mm
Connection	Regular fence accessories ,clips






CANADA TEMPORARY FENCE



Wire Diameter	3.0mm, 3.5mm, 3.8mm, 4.0mm, 4.5mm, etc.
Mesh Opening (mm)	50x200,50x100,50x150,75x 100,75x150,etc.
H x W	6ft x 9ft, 6ft x 9.5ft, 6ft x 10ft, etc.
Outside Frame	25x25mm, 30x30mm
Middle Frame	20x20mm, 25x25mm
Frame Thickness	0.8mm,1.0mm, 1.5mm, 2.0mm, 2.5mm, 3.0mm
Fence feet(L*W*T)	563x89x7mm, 863x89x8mm,etc
Accessories	top clip to connect two panels together
Color	blue, green, red, dark green,orange etc
Surface Finish	galvanized + powder coated
ALL SIZES CAN CUSTOMIZED ACCORDING TO YOUR REQUEST	

Product structure

1 fence set=1 fence panel+1 top clip+1 base feet

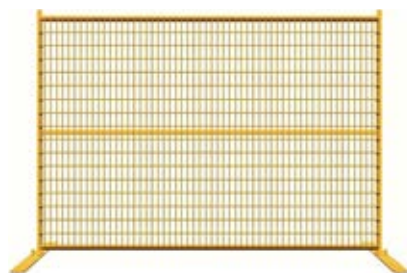

Fence panel




Top clip



Base feet




TEMPORARY CHAIN LINK FENCE PANEL

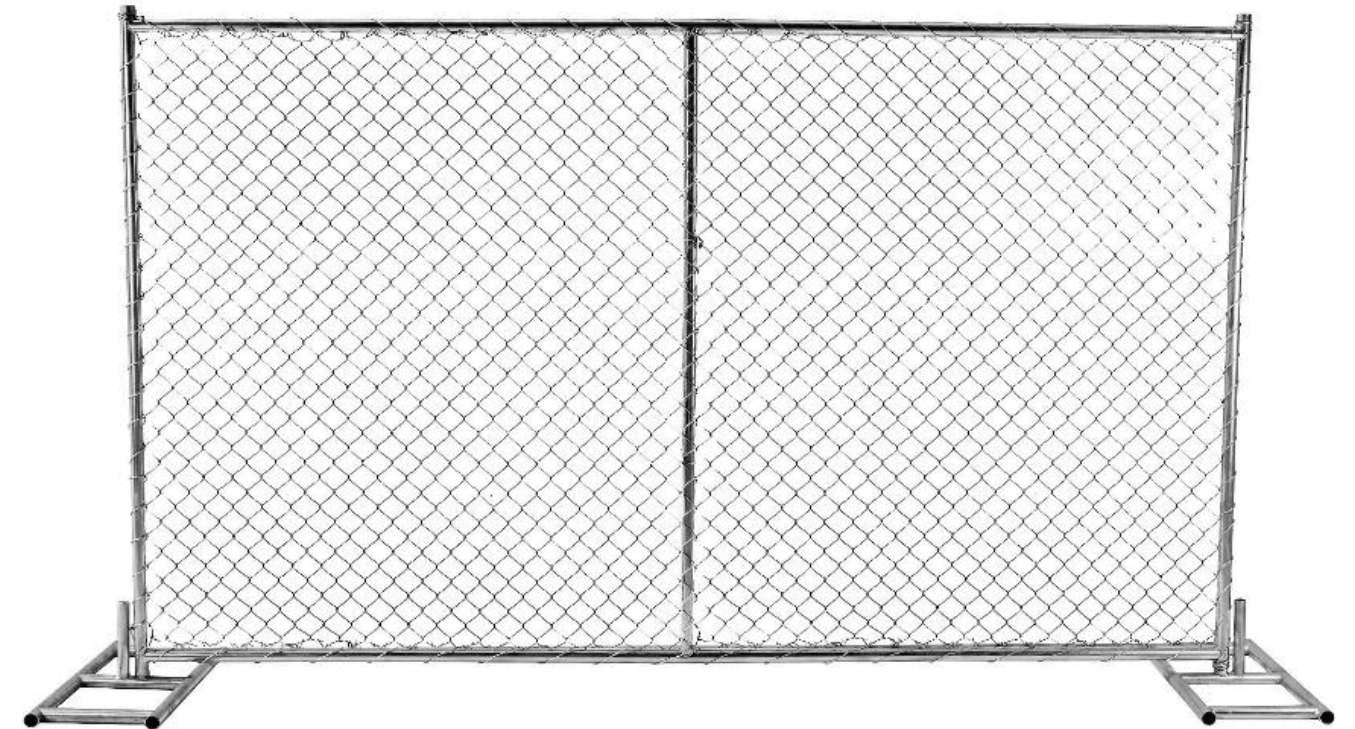

SPECIFICATION OF CHAIN LINK TEMPORARY FENCE	
FENCE HEIGHT	4FT, 6FT, 8FT (1200MM,1800 MM, 2400 MM)
FENCE WIDTH/LENGTH	8FT,10FT, 12FT, 14FT, ETC (2400 MM, 3000 MM, 3700 MM, 4300 MM)
WIRE DIAMETER	2.7MM, 2.5MM, 3MM
CHAIN LINK MESH SIZE	57X57MM (2-1/4"), 50X50MM, 60X60MM, ETC.
FRAME TUBE O.D	33.4MM (1-3/8"), 32MM, OR 42MM (1-5/8") WITH 0.065" WALL THICKNESS
VERTICAL/CROSS BRACE TUBE O.D	25MM OR 32MM WITH 1.6MM (0.065") WALL THICKNESS
FENCE BASE/STAND	610X590MM, 762X460MM, ETC
ACCESSORIES	CLAMPS, BASE FEET, TENSION WIRE AND TENSION BAR (OPTIONAL)
MATERIAL	HOT DIPPED GALVANIZED
SURFACE TREATMENT	ALL JOINTS ARE WELDED AND SPRAYED WITH A GALVANIZED PAINT TO COVER ANY EXPOSED METAL




3D CURVED WIRE MESH FENCE PANEL

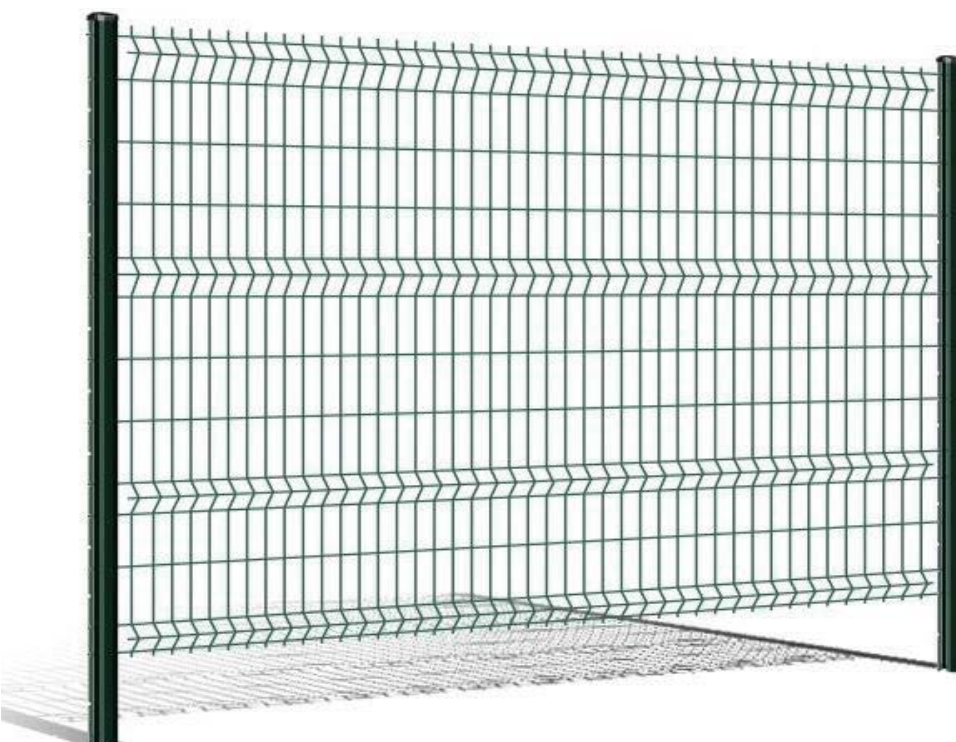

3D Curved Fence

The Welded Wire Mesh Fence with Curved is widely used in the Garden, backyard, villa Public Ground, Farm, Highway Industry Zone. Fence with Curved can make more stable and stronger, square post or peach post with plastic and metal clips are convenient to installation.

The Fence surface treatment can be powder coated, better help the protect the wire inside, and color can do as you requested: Most popular color is green, white, grey.

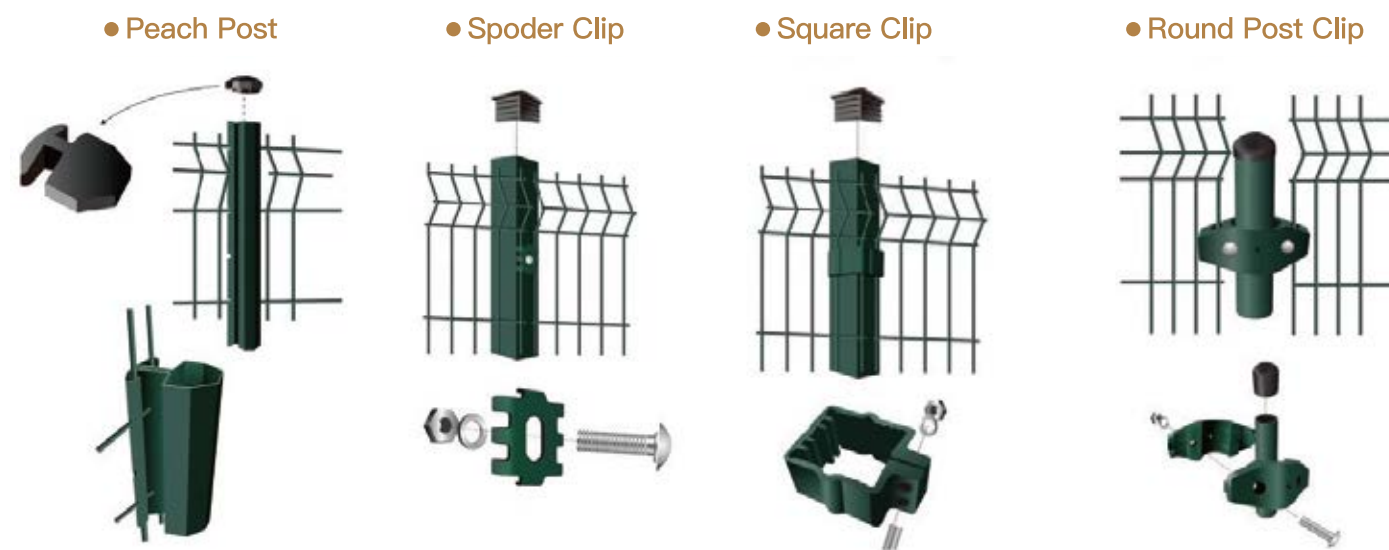

HEBEI DUNQIANG



3D CURVED WIRE MESH FENCE PANEL

Wire thickness	Mesh Opening	Height	Folds No	Length
Galvanized + Powder Painted 3.8mm/4.0mm 4.8mm/5.0mm 5.8mm/6.0mm Galvanized + PVC Coated 3.0mm/4.0mm 4.0mm/5.0mm 5.0mm/6.0mm Hot dipped Galvanized	50*200mm	2030mm	4	1.5m
		2230mm	4	
	55*200mm 50*100mm 55*100mm	2430mm	4	1.8m
		1730mm	3	2.0m
	50*150mm 55*150mm	1530mm	3	2.5m
		1230mm	2	3.0m
		1030mm	2	
	Color	Ral 6005(Green), Ral 9005(Black), Ral 7016(Gray), Ral 9010(White), Ral8014(Brown)		
Post	Round post, Square Post, Rectangular Post, Peach Post			
Other specifications are also available, all can be customized.				





AIRPORT FENCE

Specification of Welded wire mesh airport fence

Flat mesh panel	height(m)	2.03,2.23,2.43
	width(m)	2.5 or 3.0
	hole opening(mm)	50*100,50*150
	wire diameter(mm)	4-5
	material	low carbon steel wire,galvanized wire
	curve quantity	normal 2 height:3-4
V type mesh panel	height(m)	0.5
	length(m)	2.3 or 3
Post type with V arm	square post(mm)	60*60*2, 60*60*3
	post(mm)	60*80*3
	length(m)	normal 2.8-3
	clamps	steel or plastic
Finished	pvc coated or hot dipped Galvanized	



AIRPORT FENCE


Specification of Chain link wire mesh airport fence



Chain Link wire mesh roll	Hole size:	35X35mm, 50K50mm.60X60mm,80KB0mm
	Wire length width	15mK3m,15mK2.5m,15mK2.3m,15mK2m,15mK1.8m, Length can be adjusted.
	Wire Diameter	2.3mm,4.0mm,5.0mm
	Surface	Pvc coated,Hot Dip Galvanized, Hot dip galvanized+PWC coated
Line wire ,Tie wire. Stirrup wire	Wire Diameter	2.5mm,3mm,3.5mm,4.5mm,
	Length	100m.50m.
	Surface	Pvc coated,Hot Dip Galvanized, Hot dip galvanized+PiC coated
Fence posts(Straining Posts,Conner posts)	Qut Diameter thickness	60mm(3.2mm thick)76mm(3.2mm thick. 42mm(3.2mm Tick)
	Length	2.5m-4m
	Surface	PvC coated,Hot Dip Galvanized. Hot dip galvanized+PVC coated
Steel bar	Width and Thickness	25mm X 5mm x length
	Surface	Hot dip galvanized &PVC




WELDED WIRE MESH

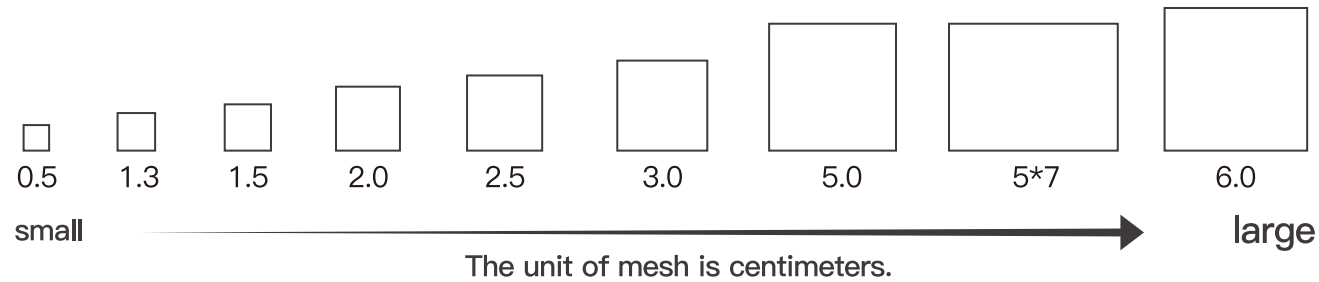

Specification of Welded Wire Mesh				
Opening		Wire Diameter	Width 0.4-2M Length 5-50m	electric galvanized before welded, electric galvanized after welded, hot-dipped galvanized before welded, hot-dipped galvanized after welded, PVC coated, Stainless steel wire
In inch	In metric unit			
1/4" x 1/4"	6.4 x 6.4mm	BWG24-22		
3/8" x 3/8"	10.6x 10.6mm	BWG22-19		
1/2" x 1/2"	12.7 x 12.7mm	BWG23-16		
5/8" x 5/8"	16x 16mm	BWG21-18		
3/4" x 3/4"	19.1 x 19.1mm	BWG21-16		
1" x 1/2"	25.4x 12.7mm	BWG21-16		
1-1/2" x 1-1/2"	38 x 38mm	BWG19-14		
1" x 2"	25.4 x 50.8mm	BWG16-14		
2" x 2"	50.8 x 50.8mm	BWG15-12		
2" x 4"	50.8 x 101.6mm	BWG15-12		
4" x 4"	101.6 x 101.6mm	BWG15-12		
4" x 6"	101.6 x 152.4mm	BWG15-12		
6" x 6"	152.4 x 152.4mm	BWG15-12		
6" x 8"	152.4 x 203.2mm	BWG14-12		


Note: Special specifications can be made according to customers requires.

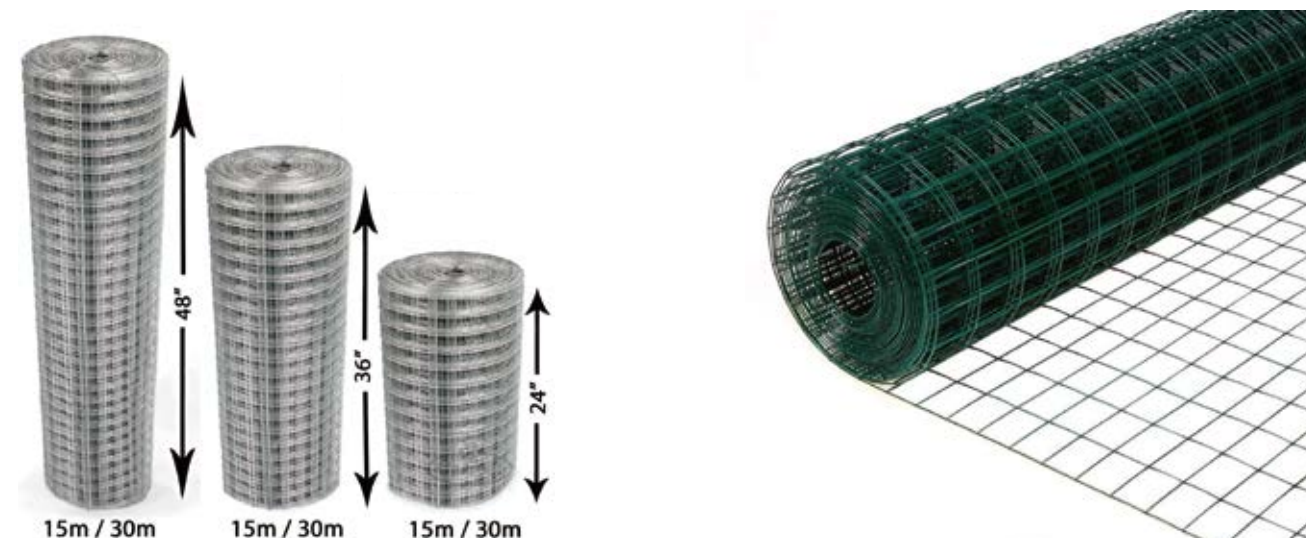


CHAIN LINK FENCE

Available Wire Gauges


The gauges available are:



Twist

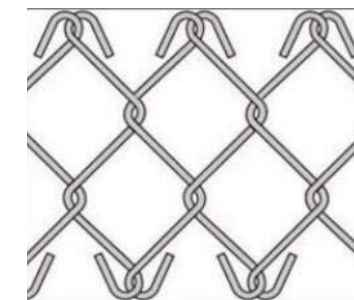

Kunckle




Twist & Kunckle

Mesh opening	1”	1.5”	2”	2-1/4”	2-3/8”	2-1/2”	2-5/8”	3”	4”
	25mm	40mm	50mm	57mm	60mm	65mm	70mm	75mm	100mm
Wire diameter	18Ga – 13Ga		16Ga – 8Ga					14Ga-6Ga	
	1.2mm–2.4mm		1.6mm – 4.2mm					2.0mm–5.00mm	
Width of per roll	50M – 100M(or more)								
Length of per roll	0.5M – 6.0M								






WELDED GABION

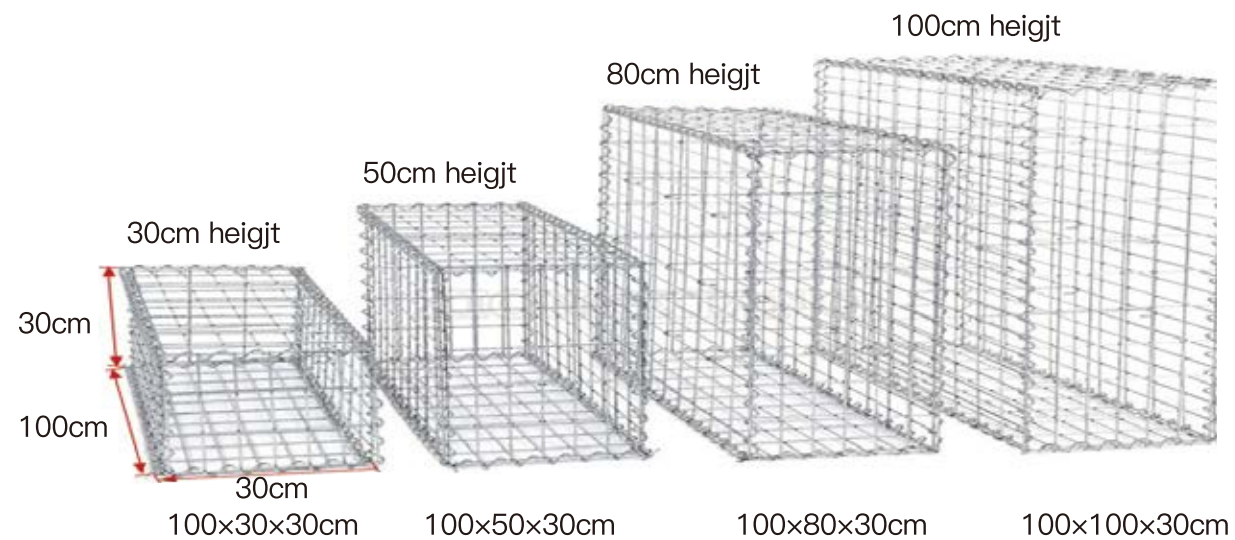

Specification of Welded Gabion				
Model	Gabion Box Size (Length*Width*Height)	Wire Diameter (mm)	Mesh Openingr (mm)	Material
DQ-01	2*1*1 m	3.0-6.0 mm	50*50mm 75*75mm 50*100mm 100*100mm 100*200mm	Hot dip galvanized Hot dip galvanized after welding Galfan coated PVC coated
DQ-02	2*1*0.5 m			
DQ-03	1.5*1*1 m			
DQ-04	1*1*1 m			
DQ-05	1*1*0.5 m			
DQ-06	1*0.5*0.5 m			
DQ-07	1*0.6*0.3 m			
DQ-08	1*0.5*0.3 m			
DQ-09	1*0.3*0.3 m			
Note: All sizes and materials of the weled gabion can be customized according to your request.				



HEXAGONAL WIRE MESH

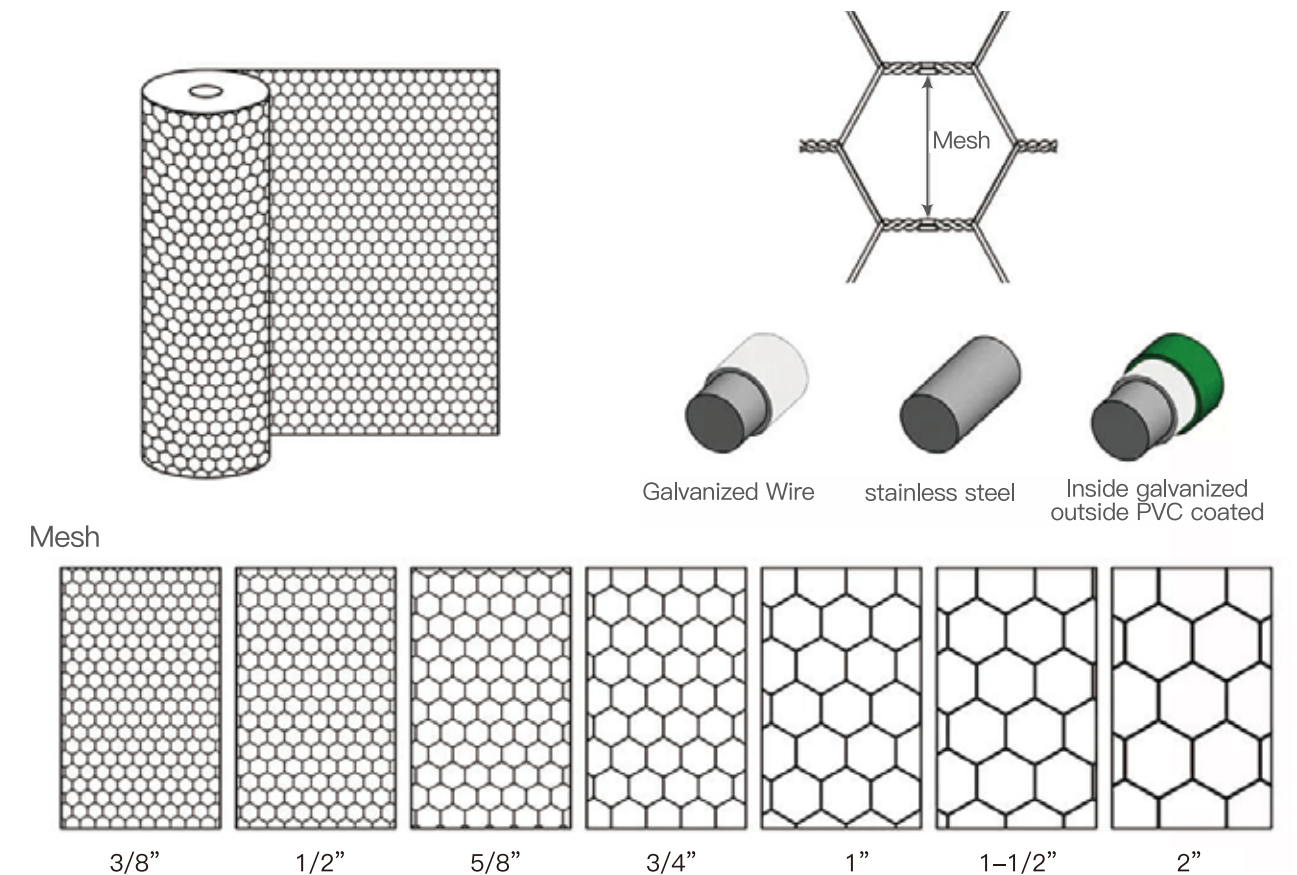


Hole size		Wire diameter	Panel sizes
In inch	lIn mm	In mm	Width:0.5m-2.0m Length:25m,30m Other sizes can be made as request .
3/8"	9.52mm	0.42mm-0.50mm	
1/2"	12.7mm	0.38mm-0.80mm	
5/8"	16mm	0.38mm-1.0mm	
3/4"	19mm	0.38mm-1.2mm	
1"	25.4mm	0.38mm-1.2mm	
5/4"	31mm	0.55mm-1.2mm	
3/2"	38.1mm	0.55mm-1.4mm	
2"	50.8mm	0.55mm-1.5mm	
3"	76.2mm	0.65mm-1.5mm	
4"	101.6mm	1.2mm-2.0mm	




VINEYARD METAL POST C TYPE

We're professional Manufacturer of vineyard post. It's strongest design and economic, easy to installation .

The metal post systems produced by our company are excellent for erecting special post systems in vineyards, orchards, and they can be used for hail protection systems at the same time. The metal steel post systems mainly used in vineyard, orchard, grape manor, agriculture plantation and farming. Compared to traditional wooden post systems, it has far more advantages thanks to its design and easy set-up, strong and long life.

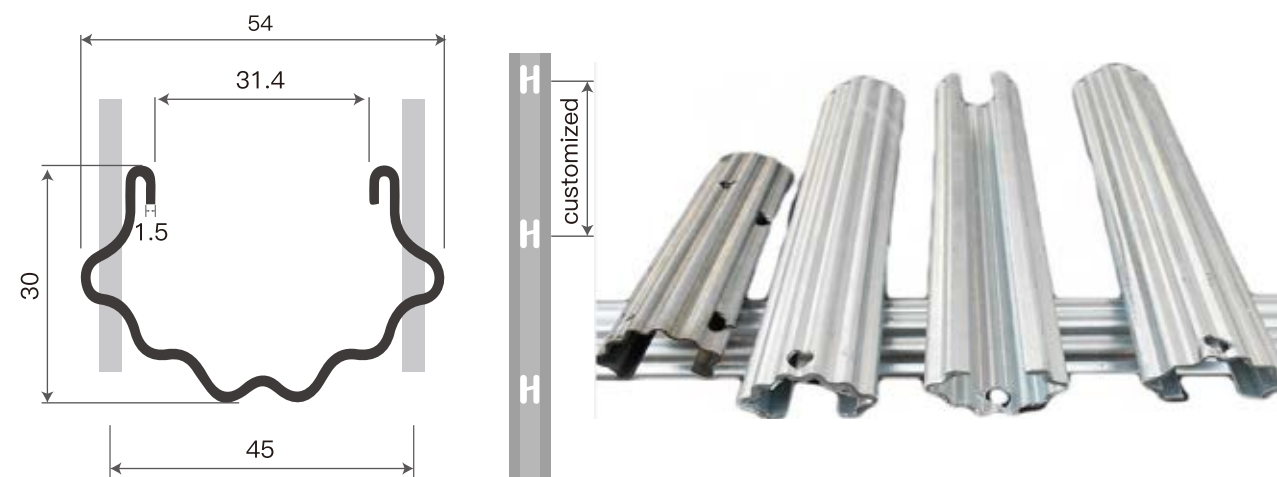

VINEYARD METAL POST C TYPE

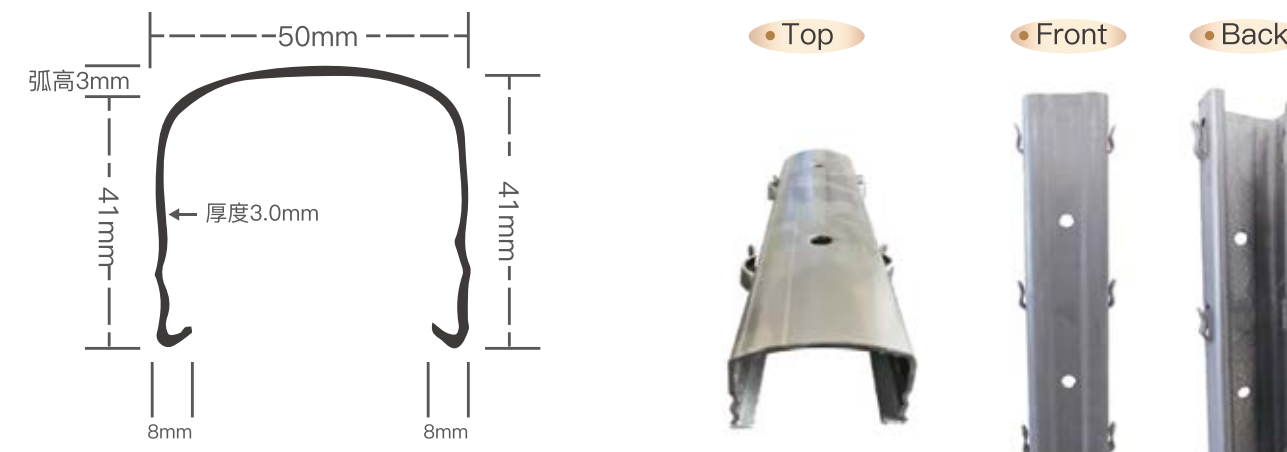

Hot dipped galvanized steel vineyard trellis post					
Thickness	40x30mm	54x30mm	50X40mm	60x40mm	Length
1.5mm	√	√	√	√	1.8m-2.8m
1.8mm	√	√	√	√	2.0m-2.8m
2.0mm		√	√	√	2.0m-2.8m
2.5mm			√	√	2.0m-3.0m





OPEN GABLE TRELLIS SYSTEM

The vineyard gable trellis post is made with hot rolled steel. It's "Y" shape, some people also called it "V" shape.

Trellises are an essential part of growing beautiful and healthy grapes. They also serve many other purposes. Grape vines get become heavy after they start bearing fruit.

Trellis offers better support when vine is trained, and it grows up on the wires as well as supports.

The high trellis system allows for better air flow and efficient growing techniques. It also creates a cooler and shaded environment for harvesting. Our unique trellis system enhances our plastic covering program ensuring quality product for the fall harvest.



HEBEI DUNQIANG



OPEN GABLE TRELLIS SYSTEM

		Head system on both ends of each row	Lone system in the middle of each row
Materials		Steel	
Length	Righe/left arms		
	Cross arm	0.8–1.5m,it can be customized	
Thickness	Right/left arms		
	Cross arm	4.0mm,5.0mm etc	2.0mm,2.5mm,2.7mm etc
Steel angle	Right/left arms	1.75“X1”(44.45*25.4mm) 2“X2”(50.8*508mm) 2“X1.5”(50.8*38mm)etc	
	Cross arm		
Surface treatment	Galvanized,hot dipped galvanized etc		
The holes	Round holes or “t”Type holes		
MOQ	A 20’container		
	A set t type vineyard post= a right arm + a left arm +a cross arm And with some accessories		



Clips: Tocnnect the open gable arms with the steel wire rope



Aluminium Ferrule



Open Gable Trellis Post with accessories parts



Wire Strainer: To connrct the open gable arms with the galvanized steel wire



Wirevise: To connect the open gable arms with the galvanized steel wire





CATTLE LIVESTOCK FENCE PANEL

Round tube cattle panel	
Height*Length	1m*2.1m,1m*2.9m,1.8m*2.1m
Horizontal rails	32mmOD,42mmOD, (6 round rail)
Vertical pipe	32mmOD,42mmOD
Thickness	1.6mm, 2.0mm
Material	pre hot dipped galvanized steel pipe
Accessories	4 lugs, 2 rain caps are welded on panel2 pins are included in 1 panel



CATTLE LIVESTOCK FENCE PANEL



Square tube cattle panel	
Height*Length	1m*2.1m,1m*2.9m,1.8m*2.1m
horizontal rails	40*40mm,50*50mm (6 square rail)
vertical pipe	40*40mm,50*50mm
Thickness	1.6mm, 2.0mm
material	pre hot dipped galvanized steel pipe
Accessories	2 U lugs, 2 L lugs, 2 rain caps and 2 bases are welded on panel2 pins are included in 1 panel




CATTLE LIVESTOCK FENCE PANEL

Oval rail with square post style	
Height	1.6m, 1.8m, etc.
Width	2.07m, 2.09m, 2.9m, etc.
Horizontal oval rail	30x60mm, 40x80mm, 42x115mm;4pcs, 5pcs or 6pcs
Vertical square tube	40x40mm, 50x50mm, 75x75mm, etc.2pcs
Welded parts	U lugs, L lugs, caps, panel base
Accessories	pins
Material	hot dipped galvanized steel



CATTLE LIVESTOCK FENCE PANEL

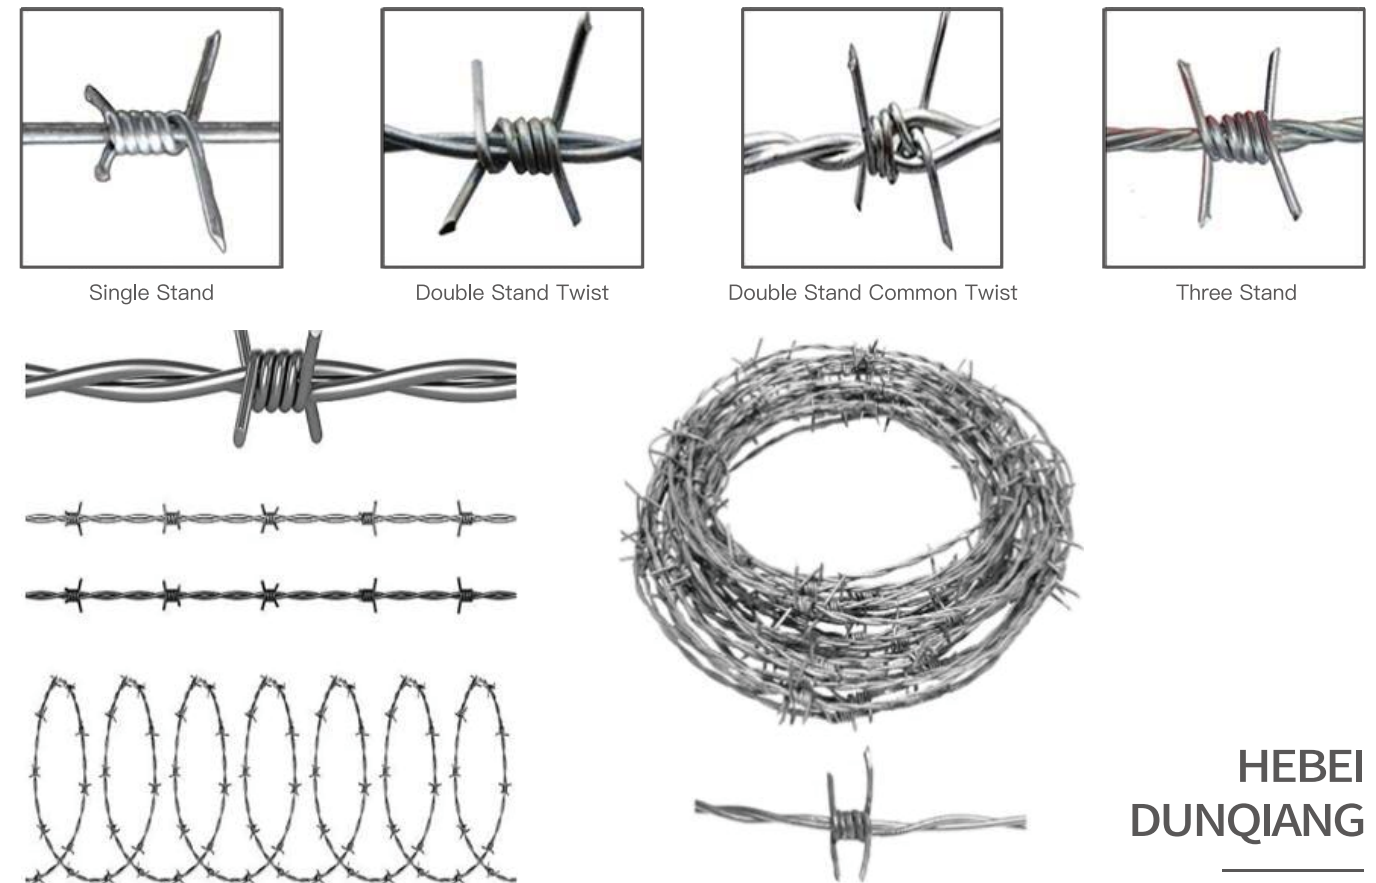


HEBEI
DUNQIANG

Gauge of Strand and Barb in B.W.G.	Approximate Length per Kilo in Meter			
	Barbs Spacing 3"	Barbs Spacing 4"	Barbs Spacing 5"	Barbs Spacing 6"
12x12	6.0617	6.759	7.27	7.6376
12x14	7.3335	7.9051	8.3015	8.5741
12-1/2x12-1/2	6.9223	7.719	8.3022	8.7221
12-1/2x14	8.1096	8.814	9.2242	9.562
13x13	7.9808	8.899	9.5721	10.0553
13x14	8.8448	9.6899	10.2923	10.7146
13-1/2x14	9.6079	10.6134	11.4705	11.8553
14x14	10.4569	11.659	12.5423	13.1752
14-1/2x14-1/2	11.9875	13.3671	14.3781	15.1034
15x15	13.8927	15.4942	16.6666	17.507
15-1/2x15-1/2	15.3491	17.1144	18.406	19.3386
Barbed distance :7.5-15/cm		Barbed length:1.5-3/cm		



T POST

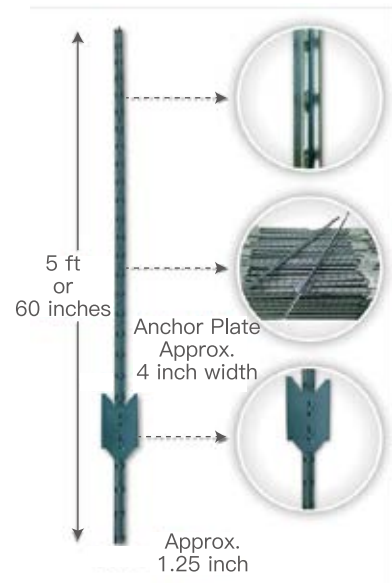

HEBEI
DUNQIANG

STUDDED T POST,AMERICAN TYPE METAL FENCE POST								
MEASUREMENT	SPEC	5'	5.5'	6'	6.5'	7'	8'	10ft or other customized length
		pct/mt	pct/mt	pct/mt	pct/mt	pct/mt	pct/mt	
LIGHT DUTY	0.95lb/ft	464	422	386	357	331	290	
	1.10lb/ft	400	364	334	308	286	250	
REGULAR DUTY	1.15lb/ft	383	348	319	295	274	239	
	1.25lb/ft	352	320	294	271	252	220	
HEAVY DUTY	1.33lb/ft	331	301	276	255	237	207	
	1.50lb/ft	291	268	243	227	210	184	



Y POST



Y post , Star Picket									
Measurement	0.45M	0.60M	0.90M	1.35M	1.50M	1.65M	1.80M	2.10M	2.40M
SPEC	PCS/MT	PCS/MT	PCS/MT	PCS/MT	PCS/MT	PCS/MT	PCS/MT	PCS/MT	PCS/M
1.58kg/m	1406	1054	703	468	421	386	351	301	263
1.86kg/m	1195	896	597	398	358	326	299	256	224
1.90kg/m	1170	877	585	390	351	319	292	251	219
2.04kg/m	1089	817	545	363	326	297	272	233	204
3.50kg/m					211	173	158	136	119

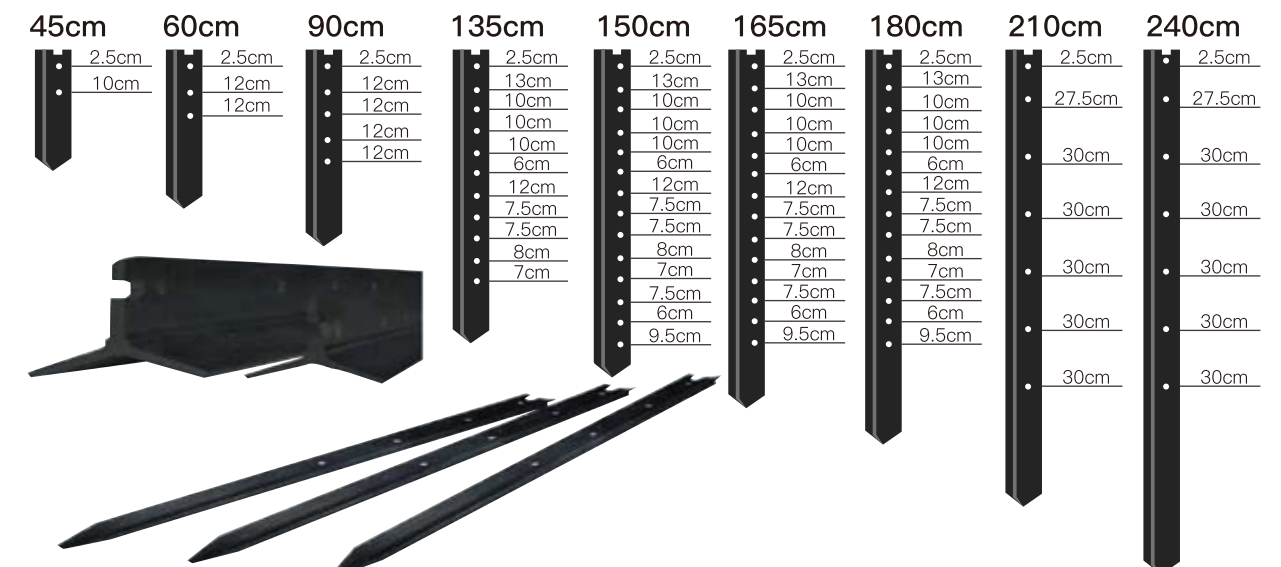




PLATE TENNIS COURT

Padel court system(20m*10m*1set)			
Item	Specification	Size	quantity
Column	Material:Q235steel+Epoxy zinc-rich primer + electrostatic spraying Color: blue	Size: 100mm*100mm*3mm Length: 3m	4 pcs
Top fence	Material:Q235steel+Epoxy zinc-rich primer + electrostatic spraying Color: Black	Size: 1m*2m Mesh diameter:4mm Seine frame: 30*50*2(mm)	14 sqm
Side of the fence	Material:Q235steel+Epoxy zinc-rich primer + electrostatic spraying Color:Black	Size: 1m*2m Mesh diameter:4mm Seine frame:30*50*2(mm)	32 sqm
Lamp post	Material:Q235steel+Epoxy zinc-rich primer + electrostatic spraying Color: Blue	Size: 50mm*100mm*3mm Length: 3m/2m	4 pcs
Side column	Material:Q235steel+Epoxy zinc-rich primer + electrostatic spraying Color: Black	Size: 50mm*100mm*3mm Length: 3m/2m	8 pcs
10m side upper and lower beams	Material:Q235steel+Epoxy zinc-rich primer + electrostatic spraying Color: blue (or customized)	Size: 100mm*100mm*3mm Length: 5m	8 pcs
Side upper and lower beams	Material: Q235+ Color: blue (or customized)	Size:blue100*50*3(mm) Upper bar: 50*100*5000mm*3mm lower bar: 50*100*5000mm*3mm Length: 4m	8 pcs
Net	Material: PP Color: black	Lenght: 10m Height: 1000cm Thickness: 3mm Mesh: 45mm	1 sets
Net column	Color: blue (or customized)	Height: 1100mm Column size: 50mm*100mm*3mm	2 pcs
Glass	Color: transparent	Height: 1995mm*2995mm Thickness: 12mm	18 pcs
Lawn	Color: blue	Size: 209 square meters Thickness: 12mm weave length :3/16 inch needle count: 300 needles/meter, 63000 clusters/square meter, fiber 9500dtex, PU adhesive.	209square meters
Light	Color: Black	Power: 200W LED	8 lamp



PLATE TENNIS COURT

